

Copies of this document may be purchased from:  
Global Engineering, 15 Inverness Way East,  
Englewood, CO 80112-5704  
Phone: (800) 854-7179 or (303) 792-2181 Fax: (303) 792-2192

dpANS NCITS xxx-199x  
T11.2/Project 123D/Rev 3

# **FIBRE CHANNEL**

**LOW COST 10km OPTICAL**

**1063 MBAUD INTERFACE**

**100-SM-LC-L**

**REV 3**

working draft proposed  
American National Standard  
for Information Systems

June 19, 1998

Secretariat:  
Information Technology Industry Council

**ABSTRACT:** This standard describes an enhancement to the ANSI X3.230, Fibre Channel Physical and Signalling Interface (FC-PH) and to the ANSI X3.297, Fibre Channel Physical and Signalling Interface - 2 (FC-PH-2) and to the ANSI X3.303, Fibre Channel Physical and Signalling interface - 3 (FC-PH-3) and is an addendum to these documents.

**NOTE:**

**This is a draft proposed American National Standard of Accredited Standards Committee NCITS. As such, this is not a completed standard. The T11.2 Technical Committee may modify this document as a result of comments received during public review and its approval as a standard.**

**POINTS OF CONTACT:**

**Schelto VanDoorn (T11.2 Chairman)**  
Siemens Components, Inc.  
19000 Homestead Road  
Cupertino, CA 95014  
(408)725-3436 Fax: (408)725-3435  
E-Mail: schelto.van-doorn@sci.siemens.com

**Edward L. Grivna (T11.2 Vice Chairman)**  
Cypress Semiconductor  
2401 East 86th Street  
Bloomington, MN 55425  
(612) 851-5046 Fax: (612) 851-5087  
E-Mail: elg@cypress.com

**Steve Joiner(T11.2 Optics Working Group  
Chairman)**  
Hewlett Packard  
350 West Trimble Road  
San Jose, CA 95131  
(408)435-6421 Fax:(408)435-6286  
E-mail:steve\_joiner@hp.com

**James E. Myers (Editor)**  
IBM Corporation  
3605 Highway 52N  
Rochester, MN 55901  
(507) 253-0370 Fax: (507) 253-1438  
E-Mail: james1@us.ibm.com

American National Standard  
for Information Technology —  
Fibre Channel—  
Low Cost 10km Optical 1063MBaud Interface  
(100-SM-LC-L)

Secretariat

**Information Technology Industry Council**

Approved \_\_\_\_\_, 199

**American National Standards Institute, Inc.**

**Abstract**

This standard describes the enhancement to the ANSI X3.230, Fibre Channel Physical and Signalling Interface (FC-PH), to the ANSI X3.297, Fibre Channel Physical and Signalling Interface - 2 (FC-PH-2) and to the ANSI X3.xxx, Fibre Channel Physical and Signaling Interface - 3 (FC-PH-3), and is an addendum to these documents.

# American National Standard

Approval of an American National Standard requires verification by ANSI that the requirements for due process, consensus, and other criteria for approval have been met by the standards developer.

Consensus is established when, in the judgement of the ANSI Board of Standards Review, substantial agreement has been reached by directly and materially affected interests. Substantial agreement means much more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered, and that a concerted effort be made towards their resolution.

The use of American National Standards is completely voluntary; their existence does not in any respect preclude anyone, whether he has approved the standards or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standards.

The American National Standards Institute does not develop standards and will in no circumstances give interpretation on any American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute. Requests for interpretations should be addressed to the secretariat or sponsor whose name appears on the title page of this standard.

**CAUTION NOTICE:** This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken periodically to reaffirm, revise, or withdraw this standard. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

**PATENT STATEMENT:** The developers of this standard have requested that holders of patents that may be required for the implementation of the standard, disclose such patents to the publisher. However neither the developers nor the publisher have undertaken a patent search in order to identify which if any patents may apply to this standard. No position is taken with respect to the validity of any claim or any patent rights that may have been disclosed. Details may be obtained from the publisher concerning any statement of patents and willingness to grant a license on a nondiscriminatory basis and with reasonable terms and conditions to applicants desiring to obtain such a license.

Published by

**American National Standards Institute  
11 W. 42nd Street, New York, New York 10036**

Copyright © 199x by American National Standards Institute  
All rights reserved

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without prior written permission of the publisher.

Printed in the United States of America

INSERT CODE HERE



## Contents

	Page
Foreword . . . . .	vii
<b>1</b> Scope . . . . .	<b>1</b>
<b>2</b> Normative References . . . . .	<b>1</b>
2.1 Approved references . . . . .	1
2.2 References under development . . . . .	1
<b>3</b> Definitions and conventions . . . . .	<b>1</b>
3.1 Definitions . . . . .	2
<b>4</b> Structure and concepts . . . . .	<b>2</b>
<b>5</b> FC-0 functional characteristics . . . . .	<b>2</b>
5.1 General Characteristics . . . . .	2
5.7 FC-0 nomenclature . . . . .	2
5.8 FC-0 technology options . . . . .	2
<b>6</b> Optical fibre interface specification . . . . .	<b>4</b>
6.1 SM data links . . . . .	4
6.1.3 SM optical response specifications . . . . .	5
6.1.4 100-SM-LC-L transmitter specifications . . . . .	5
6.1.5 100-SM-LC-L jitter specifications . . . . .	6
6.1.5.1 100-SM-LC-L jitter budget table . . . . .	6
6.1.5.2 Receiver output jitter measurement . . . . .	6
<b>7</b> Electrical cable plant specification . . . . .	<b>6</b>
<b>8</b> Optical fibre cable plant specification . . . . .	<b>6</b>
8.1 SM cable plant specification . . . . .	7
8.1.1 Cable plant loss budget . . . . .	5

## Tables

Table 1 – Optical Media Signal Interface Overview . . . . .	2
Table 2 – Optical Cable Plant Overview . . . . .	2
Table 3 – FC-0 physical links for single-mode classes . . . . .	4
Table 4 – 100-SM-LC-L jitter budget . . . . .	6
Table 5 – Single-mode cable plant . . . . .	7

## Figures

Figure 1 – FC-0 nomenclature . . . . .	3
Figure 2 – 100-SM-LC-L transmitter specifications . . . . .	5



**Foreword** (This Foreword is not part of dpANS NCITS xxx-199x.)

This Fibre Channel, Low Cost 10km Optical 1063 Mbaud Interface standard (100-SM-LC-L) describes an enhancement to the ANSI X3.230-1994 (FC-PH), X3.297-1997 (FC-PH-2), and X3.303-199X (FC-PH-3) and is an extension to these documents.

This standard was developed by Task Group T11.2 of Accredited Standards Committee NCITS during 1997-8. The standards approval process started in 1998.

Requests for interpretation, suggestions for improvement or addenda, or defect reports are welcome. They should be sent to the National Committee for Information Technology (NCITS), 1250 Eye Street, NW, Suite 200, Washington, DC 20005.

This standard was processed and approved for submittal to ANSI by NCITS. Committee approval of the standard does not necessarily imply that all committee members voted for approval. At the time it approved this standard, NCITS had the following members:

Karen Higgenbottom, Chair (Acting)  
Karen Higgenbottom, Vice-Chair  
Monica Vago, Secretary

<i>Organization Represented</i>	<i>Name of Representative</i>
AMP, Inc. ....	John Hill
	Charles Brill (Alt.)
Apple Computer Inc. ....	David Michael
	Jerry Kellenbenz (Alt.)
AT&T.....	Thomas Frost
	Paul Bartoli (Alt.)
Bull HN Information Systems Inc. ....	Patric L Harris
Compaq Computer Corporation.....	Stephen Heil
	Steve Park (Alt.)
Digital Equipment Corporation.....	Scott Jameson
	Richard Hovey (Alt.)
Eastman Kodak Company .....	Michael Nier
Hewlett-Packard Company .....	Karen Higginbottom
	Donald Loughry (Alt.)
Hitachi American Ltd.....	John Neumann
	Kei Yamashita (Alt.)
Hughes Aircraft Company.....	Harold Zebrack
IBM Corporation.....	Ron Silletti
	Joel Urman (Alt.)
Imation.....	Philip E. Friedlund
Institute for Certification of Computer Professionals (ICCP).....	Kenneth M. Zemrowski
Lucent Technologies Inc. ....	Herbert Bertine
	Tom Rutt (Alt.)
National Communications Systems .....	Dennis Bodson
	William Olden (Alt.)
	Frank McClelland (Alt.)
National Institute of Standards & Technology.....	Michael Hogan
	Bruce K. Rosen (Alt.)
Panasonic Technologies Inc.....	Judson Hofmann
	Y. Machida (Alt.)
Share Inc. ....	Dave Thewlis
	Gary Ainsworth (Alt.)
Sony Electronics Inc. ....	Masataka Ogawa
	Michael Deese (Alt.)
Storage Technology Corporation.....	Joseph Zajackowski
Sun Microsystems Inc.....	Gary Robinson
Sybase Inc. ....	Donald Deutsch
Texas Instruments Inc. ....	Clyde Camp
	Fritz Whittington (Alt.)
Unisys Corporation .....	Arnold F. Winkler
	Stephen Oksala (Alt.)
U.S. Department of Defense/DISA .....	C. J. Pasquariello

U.S. Department of Energy .....	Carol Blackston Bruce R. White (Alt.)
Xerox Corporation .....	John B. Flannery Roy Pierce (Alt.)

Technical Committee T11 on Device Level Interfaces, which reviewed this standard, had the following members:

Roger Cummings, Chair  
Edward Grivna, Vice-Chair

A. Abe	E. Gardner	C. Nieves
I. Ahmed	A. Ghiasi	M. O'Donnell
D. Allan	M. Griffin	J. Oliver
D. Allen	D. Hagerman	T. Palkert
R. Anantharaman	B. Ham	J. Parker
B. Atkinson	T. Harrington	R. Pedersen
D. Baldwin	N. Harris	D. Perkins
C. Bazaar	V. Haydu	D. Peterson
S. Berglund	D. Hepner	W. Rickard
S. Berman	M. Hoard	C. Ridgeway
C. Binford	D. Hollenback	R. Ronald
R. Bossard	T. Hudson	E. Rydell
P. Boulay	D. Hyer	J. Salamone
J. Bowerman	D. Instone	J. Schaefer
C. Brill	B. Johnson	J. Scheible
L. Bryant	D. Johnson	P. Seto
E. Cady	S. Joiner	B. Smith
J. Calle	J. Jones	R. Snively
E. Chang	S. Jones	T. Sprengle
M. Chenery	M. Karg	J. Stai
K. Conroy	A. Kelley	G. Stephens
R. Cook	J. Kembel	A. Stone
J. Coomes	R. Kembel	S. Swanson
R. Cornelius	B. Ketchum	T. Szostak
R. Crouch	R. Kleckowski	R. Taborek
G. Crow	B. Kuypers	J. Tatum
Z. Daggett	K. Kwiat	T. Thompson
R. Dahlgren	D. LaFollette	L. Thorsbakken
S. Darnell	P. Lawthers	D. Tolmie
J. Dedek	E. Lee III	H. Truedstedt
D. Deming	P. Levin	S. VanDoorn
K. Desai	T. Lindsay	M. Wakele
M. Dorsett	J. Lohmeyer	N. Wanamaker
J. Dumont	A. Martin	G. Warden
B. Edge	W. Martin	C. Whitby-Strevens
M. Fitzpatrick	J. Mathis	B. Willard
D. Ford	J. McGrath	J. Williams
C. Foster	V. Melendy	S. Wilson
M. Foster	G. Milligan	M. Wingard
R. Franse	C. Monia	K. Witte
K. Fredericks	J. Myers	R. Yonemoto
E. Frymoyer	H. Naidu	C. Zeitler
	J. Neer	
	J. Nelson	



Task Group T11.2 on Physical Variants, which developed this standard, had the following participants:

Schelto VanDoorn, Chair  
Ed Grivna, Vice-Chair  
James Myers, Technical Editor

D. Allen	E. Grivna	S. Meyer
K. Ansari	B. Ham	J. Myers
T. Arai	H. Hashemi	H. Naidu
C. Brill	V. Haydu	J. Nauman
D. Brown	D. Hyer	J. Neer
S. Bruns	D. Instone	C. Nogales
E. Cady	M. Jenkins	J. Parker
R. Caplette	J. Johns	B. Rumer
E. Chang	G. Kapraun	J. Salamone
K. Conroy	M. Karg	R. Snively
J. Coomes	R. Keleckowski	R. Soderstrom
R. Crouch	A. Kelley	A. Stone
R. Cummings	A. Kramer	T. Szostak
Z. Daggett	B. Kuypers	R. Taborek
R. Dahlgren	K. Kwiat	J. Tatum
T. DiBene	R. Lee	L. Torres
M. Donhowe	E. Lee III	H. Truedtedt
J. Dumont	P. Levin	S. VanDoorn
R. Feldman	T. Lindsay	K. Vines
C. Foster	B. Mable	F. Weniger
E. Frymoyer	B. Marsh	C. Whitby-Strevens
M. Gerwig	W. Martin	J. Williams
A. Ghiasi	R. Mejia	M. Wingard
M. Griffin	V. Melendy	



draft proposed American National Standard  
for Information Technology—

# Fibre Channel — Low Cost 10km Optical 1063MBaud Interface — (100-SM-LC-L)

## 1 Scope

100-SM-LC-L describes an enhancement to ANSI X3.230, FC-PH, to ANSI X3.297, FC-PH-2 and to ANSI X3.303, FC-PH-3, and is an addendum to the FC-PH, FC-PH-2, and FC-PH-3 documents.

This document is an extension to the FC-PH, FC-PH-2, and FC-PH-3 standards and describes a low cost 10km optical interface.

## 2 Normative References

The following standards contain provisions which, through reference in this text, constitute provisions of this standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent editions of the standards listed below.

Copies of the following documents can be obtained from ANSI: Approved ANSI standards, approved and draft international and regional standards (ISO, IEC, CEN/CENELEC, ITUT), and approved foreign standards (including BSI, JIS, and DIN). For further information, contact ANSI Customer Service Department at 212-642-4900 (phone), 212-302-1286 (fax) or via the World Wide Web at <http://www.ansi.org>.

### 2.1 Approved references

ANSI X3.230-1994, *Fibre Channel Physical and Signalling Interface (FC-PH)*

ANSI X3.297-1996, *Fibre Channel Physical and Signalling Interface - 2(FC-PH-2)*

ANSI X3.303-199X, *Fibre Channel Physical and Signalling Interface - 3(FC-PH-3)*

ISO/IEC 825-1,

### 2.2 References under development

ANSI *Fibre Channel Methodologies for Jitter Specifications* Technical Report (FC-MJS TR)

## 3 Definitions and conventions

For 100-SM-LC-L, the following definitions and the definitions, conventions, abbreviations, acronyms, and symbols defined in X3.230-1994 (FC-PH), X3.297-1996 (FC-PH-2), and X3.303-199X (FC-PH-3) apply. Definitions

**3.1 Definitions**

**3.1.1 T<sub>RISE\FALL</sub>**: The adjusted 20% to 80% rise and/or fall times of the optical signal.

**3.1.2 T<sub>RISE\FALL\_MEASURED</sub>**: The measured 20% to 80% rise and/or fall times of the optical signal.

**3.1.3 T<sub>RISE\FALL\_FILTER</sub>**: The measured 20% to 80% rise and/or fall times of a fourth order Bessel Thompson filter

**4 Structure and concepts**

No change.

**5 FC-0 functional characteristics**

The enhancement of an additional physical variant to FC-PH, FC-PH-2, and FC-PH-3, is specified.

**5.1 General characteristics**

The FC-2 protocol is defined to operate across connections having a BER detected at the receiving node of  $10^{-12}$ . It shall be the combined responsibility of the component vendors and the system integrator to ensure that this level of service is provided in a given Fibre Channel installation.

The general characteristics specified in FC-PH 5.1 are enhanced as follows:

- A low cost 10km interface operating at data rate of 1 063 MBaud using a long wavelength (1310nm) laser on single mode fiber is defined in this standard.

**5.7 FC-0 nomenclature**


The nomenclature for the technology options are illustrated in Figure 1 on page -3.

**5.8 FC-0 technology options**

Optical media signal interface enhancements are included in Table 1 based on FC-PH table 2.

Optical cable plant enhancements are included in Table 2 based on FC-PH table 4.

<b>Table 1 – Optical Media Signal Interface Overview</b>	<b>Table 2 – Optical Cable Plant Overview</b>
100 MB/sec 1,062 Gbaud	Single Mode
<b>100-SM-LC-L</b> Subclause 6.1 SM 1310nm 2m-10km	<b>100-SM-LC-L</b> Subclause 6.1 SM 1310nm 2m-10km

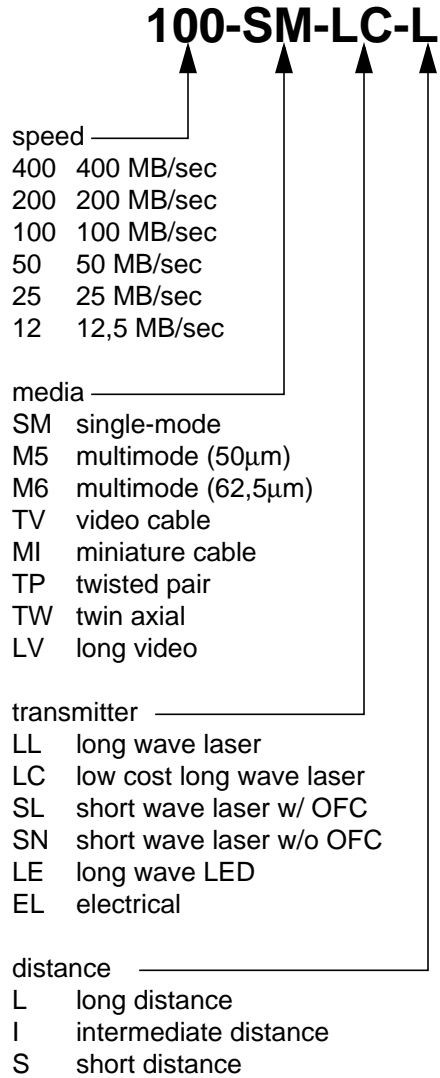

**Figure 1 – FC-0 nomenclature**

## 6 Optical fibre interface specification

Enhancement to FC-PH, FC-PH-2, and FC-PH-3 is specified.

### 6.1 SM data links

Table 3 includes a low cost 10km link operating at 1063 MBaud using a long wave wavelength (1310nm) laser on single mode fiber. The optical power coupled into the fibre shall be limited to a maximum value consistent with Class 1 laser safety operations in accordance with IEC 825-1.

**Table 3 – FC-0 physical links for single-mode classes**

FC-0	Units	100-SM-LC-L
Subclause		FC-PH-2 6.1
Data rate	MB/sec	100
Nominal bit rate	MBaud	1062.5
Tolerance	ppm	±100
Operating range	m	2-10k
Fibre core diameter	µm	9
Transmitter (S)		
Type		Laser
λ (Spectral centre wavelength)	nm (min.)	<b>(C)</b>
	nm (max.)	<b>(C)</b>
RMS spectral width	nm (max.)	<b>(C)</b>
Launched power, max.	dBm (ave.)	-3
Launched power, min.	dBm (ave.)	<b>(C)</b>
Extinction ratio	dB (min.)	9
RIN (max.)	dB/Hz	-116
Rise and fall time <b>(A)</b>	ps (max) (20%-80%)	320
Total Jitter <b>(B)</b>	% (min.)	<b>(E)</b>
Deterministic jitter	% (p-p)	<b>(E)</b>
Receiver (R)		
Received power, min. <b>(B) (D)</b>	dBm (ave.)	-20
Received power, max.	dBm (ave.)	-3
Optical path penalty	dB (max.)	<b>(F)</b>
Return loss of receiver	dB (min.)	12
<b>(A)</b> See subclause 6.1.3		
<b>(B)</b> @BER≤10 <sup>-12</sup>		
<b>(C)</b> Trade-offs are available between spectral centre wavelength, RMS spectral width, and minimum launched power. See subclause 6.1.4 and Figure 2.		
<b>(D)</b> Receiver sensitivity is measured by sampling at the time center of the eye while using a minimum specified extinction ratio source. Receiver test conditions should not incur the penalties that are already built into the link power budget.		
<b>(E)</b> See subclause 6.1.5.1 and Table 4.		
<b>(F)</b> See subclause 8.1 and Table 5		

### 6.1.3 SM optical response specifications

Optical response time specifications are based on the unfiltered waveforms. For the purposes of standardizing the measurement method, measured waveforms shall conform to the mask defined in FC-PH Figure 22: **Transmitter eye diagram mask**. If a filter is needed to conform to the mask, the filter response effect should be removed from the measured rise and fall times using the equation:

$$T_{RISE\FALL} = \sqrt{(T_{RISE\FALL\_MEASURED})^2 - (T_{RISE\FALL\_FILTER})^2}$$

The optical signal may have different rise and fall times. Any filter should have an impulse response equivalent to a fourth order Bessel Thompson filter.

### 6.1.4 100-SM-LC-L transmitter specifications

Figure 2 shows the relative trade-offs in transmitter specifications. Choosing a minimum launched power defines a compliance curve. Transmitter specifications for maximum spectral width and minimum and maximum spectral center wavelength are then defined acceptably as any point on or below the corresponding minimum launched power curve.

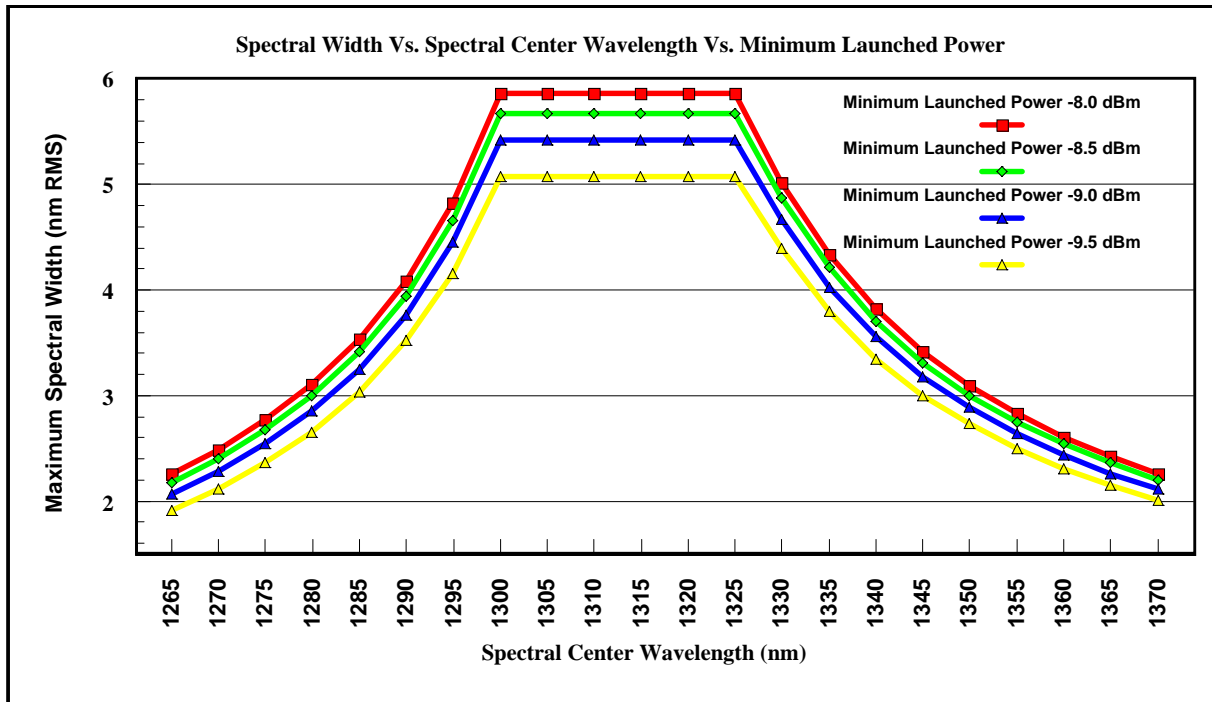


Figure 2 – 100-SM-LC-L transmitter specifications

## 6.1.5 100-SM-LC-L jitter specifications

### 6.1.5.1 100-SM-LC-L jitter budget table

The numbers in Table 4 represent high frequency jitter (above 637 kHz) and do not include low frequency jitter or wander.

**Table 4 – 100-SM-LC-L jitter budget**

Measurement Point (Compliance points are shown in bold)	Total Jitter (TJ)		Deterministic Jitter (DJ)		Reference
	UI	ps	UI	ps	
b (Serial Output) $\alpha_T$	0.210	198	0.100	94	Compliance points <b>S</b> and <b>R</b> ( $\gamma_T$ and $\gamma_R$ ), shown in bold, are defined in FC-PH Figure 9: <b>FC-0 transmitter interfaces</b> , and in FC-PH Figure 10: <b>FC-0 receiver interfaces</b> ; and in FC-MJS TR Figure 7: <b>Compliance Points for Example Fibre Channel Links.</b>
<b>S (Media Output)</b> $\gamma_T$	<b>0.430</b>	<b>405</b>	<b>0.200</b>	<b>188</b>	
<b>R (Media Input)</b> $\gamma_R$	<b>0.430</b>	<b>405</b>	<b>0.200</b>	<b>188</b>	
c (Receiver Output) $\alpha_R$	0.600	565	0.380	358	

### 6.1.5.2 Receiver output jitter measurement

Receiver TJ and DJ must comply to the listed values in Table 4 over all allowable optical power input ranges and extinction ratios as listed in Table 3. Receiver test conditions should not incur the penalties that are already built into the link power budget.

## 7 Electrical cable interface specification

No changes.

## 8 Optical fibre cable plant specification

Enhancement to FC-PH, FC-PH-2, and FC-PH-3 is specified.



## 8.1 SM cable plant specification

This subclause specifies a single-mode cable plant (see FC-PH 3.1.17 for definition) for the Low Cost 10km Optical 1063 MBaud Interface (100-SM-LC-L).

**Table 5 – Single-mode cable plant**

FC-0	Unit	100-SM-LC-L
Subclause		6.1
Operating range	m	2-10k
Zero Dispersion Wavelength $\lambda_0$	nm	$1300 \leq \lambda_0 \leq 1324$
Zero Dispersion Slope $S_0$	ps/nm <sup>2</sup> •km	$S_0 \leq 0.093$
Maximum optical path penalty (-9.5 dBm minimum launched power)	dB	2.7
Maximum optical path penalty (-9.0 dBm minimum launched power)	dB	3.2
Maximum optical path penalty (-8.5 dBm minimum launched power)	dB	3.7
Maximum optical path penalty (-8.0 dBm minimum launched power)	dB	4.2
Maximum Passive loss budget (Attenuation and Connections)	dB	7.8

### 8.1.1 Cable plant loss budget

The passive loss budget for the 100-SM-LC-L shall be no greater than specified in table 5. This limit was arrived at by taking the difference between the minimum transmitter output power (from clause 6.1, figure 2), and the receiver sensitivity (from clause 6.1, table 3) and subtracting the maximum optical path penalty corresponding to the minimum transmitter output power.

Optical path penalties shown in table 5 are the sum of the maximum calculated penalties due to inter-symbol interference, mode partition noise, reflection, and receiver eye opening requirements based on the corresponding transmitter specification curve as shown in clause 6.1.4, figure 2.

**No changes to all remaining clauses of FC-PH.**

